


TUBULAR HEATER INSTRUCTION MANUAL

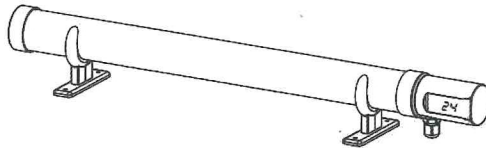

Tubular Heater Type: TH01D/ TH02D /TH03D/TH04D

YOU SHOULD READ THE MANUAL CAREFULLY BEFORE USING.

THIS LEAFLET SHOULD BE RETAINED FOR INSTRUCTIONS ON USE.

DISPOSAL




This symbol indicates that this product must not be placed in general household waste. It should be sent to a separate recycling facility for recovery, check Local Authorities for details.

By responsible recycling and separating this product from other household waste it will help protect the environment and human health, as the volume of waste sent to incinerators or land-fills will be reduced and natural resources conserved.



Read all the instructions prior to use.



<p>WARNING: Check product before use: if cord is damaged, it must be replaced by the manufacturer if still under warranty, or a similar qualified person to avoid any hazards</p>
--

1. Safety Regulations

- The tubular heater is not suitable for use outdoors in damp weather.
- **Do not** submerge into water.
- Place in a safe place away from flammable objects.
- **Do not** place flammable liquids or gasses near the heater.
- **Do not** place the heater directly below the socket outlet.
- **Do not** let the power cord over hang or touch the tube.
- **Keep out of reach of children and animals** – product gets hot to touch.
- **This is not a toy.**
- Switch off appliance when not in use.
- **Do not** hold the tubular heater by the cord.
- If using an extension cord it must be as short as possible and fully extended.
- Check heater regularly if using with a timer or any other device that switches the tubular heater on or off automatically.

2. Cleaning

Ensure product is unplugged from the mains and ensure the product is completely cold.


Wipe with a damp cloth, then finish by drying with a soft cloth. **DO NOT** use abrasive cleaning powders, cloths or metal polishes on any part of the tubular heater as this will cause damage.

3. Thermal Cut-out


The appliance is fitted with a thermal cut-out. Once the tubular heater has cooled down it will re-set itself automatically. Remove any obstruction to prevent further overheating.

4. Operation


Notice: DO NOT SWITCH POWER ON TO THE HEATER UNTIL IT IS SECURELY MOUNTED.

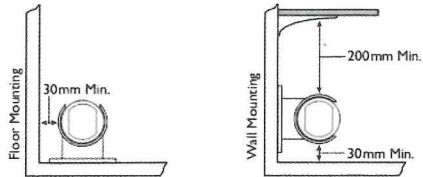

Step 1. Install the bracket as the picture showed.

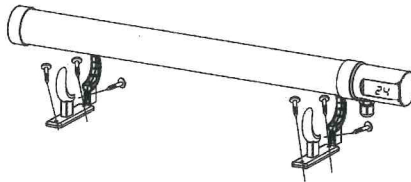

Step 2. Fix the tubular heater on the wall or on the floor like the following picture shows.



5. Tubular Heater Notice:

- The heater is fitted with a safety device which will switch off the heater in case of accidental overheating.
- To reset, change the mode to show – on screen, to allow the unit to cool down.
- Make sure that any causes of overheating, such as obstructions, are removed and plug the appliance in again.
- Turn the unit off when not in use.
- When not in use for an extended periods of time unit must be stored in a warm, dry place

6. Tubular heater features

Touch screen display, with internal timer. To scroll through the timer modes press the Setup button.

-- : Means the heater is connected to power but is not currently working.

00: Means the heater is on but is not limited by the timer



+1/2/3/4...24: Tube heater works for 1/2/3/4...24 hours and then stops working.



+1/2/3/4...24: Tube heater will start to work after 1/2/3/4...24 hours.



+1/2/3/4...24: Tube heater will work cyclically. e.g unit works for 2 hours, stop for 2 hours, then repeats

7. Tubular Heater Specifications

Model No.	Power	Electrical Supply	IP Rating	Product Length (mm)	Product Size (mm)
TH01D	60W	220-240V ,50 Hz	IP44	300mm	385*95*90
TH02D	120W	220-240V ,50 Hz	IP44	609mm	685*95*90
TH03D	180W	220-240V ,50 Hz	IP44	900mm	995*95*90
TH04D	240W	220-240V ,50 Hz	IP44	1200mm	1295*95*90

8. Warranty

This product is guaranteed under warranty and covers defects in material or workmanship from 1 year of date of purchase. The original bill of purchase (with purchase date) must be submitted.

The warranty will not apply in cases of: Misuse: by non-compliance of the instructions, normal wear and tear, incorrect use, e.g. overloading, non-approved accessories, force or damaged caused by external forces, if the plug has been tampered with or removed, partially or completely dismantled product, or interference by non-qualified persons.